


RACCORD A CAMES
AUTO-VERROUILLABLE

CAM AND GROOVE
COUPLING SELF LOCKING

NOUVEAU

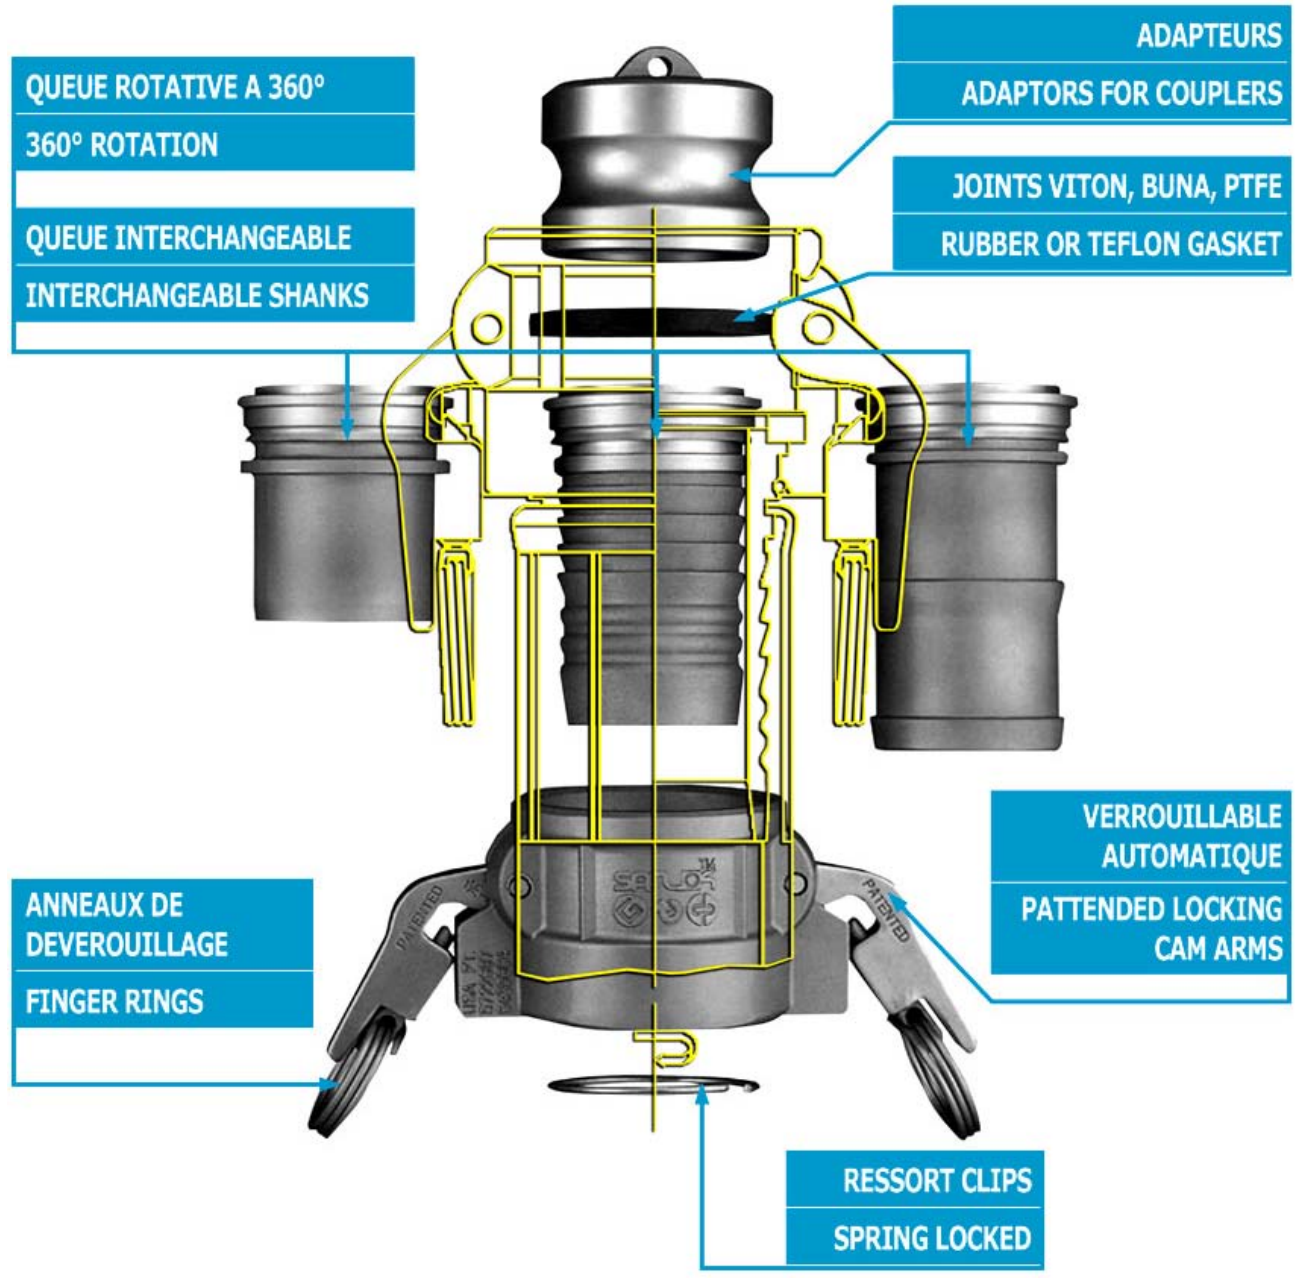

RACCORD SECURISE EQUIP'LOK

RACCORD A CAMES AUTO-VERROUILLABLE

CARACTERISTIQUES :

Les raccords à cames auto-verrouillables de type EQUIP'LOK et AUTOLOK améliorent la sécurité des transports de fluides dangereux ou onéreux et sont compatibles avec les raccords standards.

La fermeture des cames est identique au raccords classiques.

Le coupleur se verrouille automatiquement lors de la fermeture des cames. Il est ainsi protégé contre toute ouverture intempestive. Seule une traction sur les anneaux débloquent le verrouillage. Les leviers peuvent ensuite être actionnés, et le coupleur séparé de son adaptateur.

La fermeture et le verrouillage des cames se font sans effort.

Les raccords EQUIP'LOK et AUTOLOK réduisent de manière simple, efficace et automatique les risques liés aux opérations de connexions et déconnexions.



CAM AND GROOVE COUPLING SELF LOCKING

FEATURES :


The cam and groove couplings with self-locking system type EQUIP'LOK and AUTOLOK improve the safety of transfers of hazardous or expensive fluids. These couplings are compatible with standard cam and groove couplings.

The closing cam is identical to conventional cam fittings.

The coupler is automatically locked when closing cams. It is thus protected against accidental opening. Only traction on the ring releases the lock. The levers can be operated, and the coupler can be removed from the adapter.

Closing and locking the cams is effortless.

EQUIP'LOK and AUTOLOK couplings reduces simply, efficiently and automatically, risks associated with connections and disconnections.

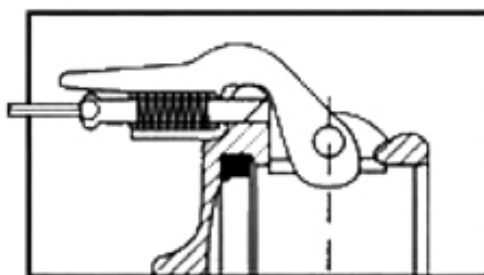

RACCORD A CAMES AUTO-VERROUILLABLE

CAM AND GROOVE COUPLING SELF LOCKING

DIMENSION SIZE

DN	Pouce	Ref.
15	1/2"	-
20	3/4"	DEL075I
25	1"	DEL100I
32	1"1/4	DEL125I
40	1"1/2	DEL150I
50	2"	DEL200I
65	2"1/2	DEL250I
80	3"	DEL300I
100	4"	DEL400I

COUPLEUR TARAUDE BSP (GAZ) FEMALE THREADED COUPLER BSP (GAZ)

EQUIP'LOK



AUTOLOK



Ref.
DLC050SS
DLC075SS
DLC100SS
DLC125SS
DLC150SS
DLC200SS
DLC250SS
DLC300SS
DLC400SS

DIMENSION SIZE

DN	Pouce	Ref.
15	1/2"	-
20	3/4"	BEL075I
25	1"	BEL100I
32	1"1/4	BEL125I
40	1"1/2	BEL150I
50	2"	-
65	2"1/2	-
80	3"	-
100	4"	-

COUPLEUR FILETE BSP (GAZ) MALE THREADED COUPLER BSP (GAZ)

EQUIP'LOK



AUTOLOK



Ref.
BLC050SS
BLC075SS
BLC100SS
BLC125SS
BLC150SS
BLC200SS
BLC250SS
BLC300SS
BLC400SS

DIMENSION SIZE

DN	Pouce	Ref.
15	1/2"	-
20	3/4"	DCEL075I
25	1"	DCEL100I
32	1"1/4	DCEL125I
40	1"1/2	DCEL150I
50	2"	DCEL200I
65	2"1/2	-
80	3"	-
100	4"	-

BOUCHON COUPLEUR DUST CAP COUPLER

EQUIP'LOK



AUTOLOK



Ref.
DCLC075SS
DCLC075SS
DCLC100SS
DCLC125SS
DCLC150SS
DCLC200SS
DCLC250SS
DCLC300SS
DCLC400SS

RACCORD A CAMES AUTO-VERROUILLABLE

CAM AND GROOVE COUPLING SELF LOCKING

COUPLEUR CANNELE COUPLER WITH HOSE TAIL

EQUIP'LOK

AUTOLOK

DIMENSION
SIZE

DN	Pouce	Ref.
15	1/2"	-
20	3/4"	CCEL075I
25	1"	CCEL100I
32	1"1/4"	-
40	1"1/2"	CCEL150I
50	2"	CCEL200I
65	2"1/2"	-
80	3"	-
100	4"	-



Ref.
-
CLC075SS
CLC100SS
CLC125SS
CLC150SS
CLC200SS
CLC250SS
CLC300SS
CLC400SS



COUPLEUR A COQUILLE COUPLER WITH SMOOTH TAIL

EQUIP'LOK

AUTOLOK

DIMENSION
SIZE

DN	Pouce	Ref.
15	1/2"	-
20	3/4"	CLEL075I
25	1"	CLEL100I
32	1"1/4"	CLEL125I
40	1"1/2"	CLEL150I
50	2"	CLEL200I
65	2"1/2"	-
80	3"	-
100	4"	-



Ref.
-
CCL075SS
CCL100SS
CCL125SS
CCL150SS
CCL200SS
CCL250SS
CCL300SS
CCL400SS

